



**ROBINETS MEMBRANE TARAUDES OU A BRIDES**

SCREWED VALVES

DN	L2		H2 (open)	Weight (Kg)
	Ductile Iron	All Other Alloys		
10	64	108	97	0.8
15	64	108	97	0.8
20	83	117	103	1.2
25	108	127	112	2
32	121	146	125	3.5
40	140	159	142	4
50	165	190	169	6
65	203	216	226	9.8
80	254	254	227	17.5

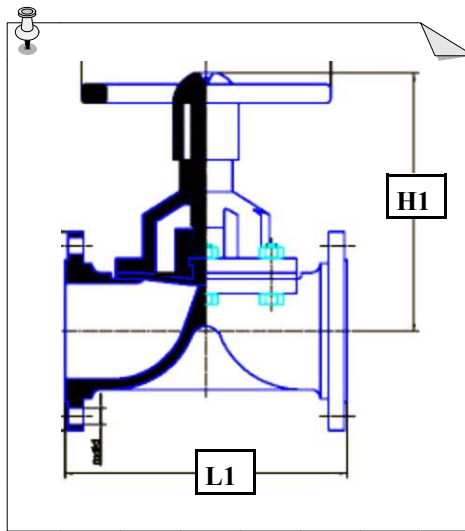

Nominal Bore (m/m)	L1 (Unlined)		L1 (Lined)		L1' (Coated)		H1 (open)	Approx Weights (Kg) Unlined	
	DIN 3202F1	BS 5156	DIN 3202F1	BS 5156	DIN 3202F1	BS 5156		DIN 3202F1	BS 5156
15	130	108	136	114	134	112	95	2.8	2.3
20	150	117	156	123	154	121	96	3.2	2.8
25	160	127	166	133	164	131	113	4.6	3.5
32	180	146	186	152	184	150	117	6.4	4.5
40	200	159	206	165	204	163	148	8.0	7.6
50	230	190	236	196	234	194	194	15.0	10.5
65	290	216	296	222	294	220	227	19.0	16.7
80	310	254	316	260	314	258	249	26.0	22.0
100	350	305	358	313	352	307	326	42.0	33.0
125	400	356	408	364	404	360	372	68.0	60.0
150	480	406	488	414	484	410	435	105.0	75.0
200	600	521	608	529	608	529	480	185.0	174.0
250	730	635	738	643	738	643	698	275.0	240.0
300	850	749	858	757	858	757	850	480.0	420.0

\* HALAR ® Coating

**ROBINETS MEMBRANE TARAUCES OU A BRIDES**

**ATRIBUTES**

